



**OUTDOOR** LED BILLBOARD

**RETOP TESII PRO-S SERIES**

## Ultra Light & Slim



96mm thick panel with a weight of 24kg, less expensive to transport and effortless to install.



## Effortless Maintenance

Simplified maintenance features of LED cabinets, ensuring hassle-free upkeep for outdoor LED billboards.



## Centralized Control Design

Optimizing maintenance efficiency and functionality of display.



## Cable Invisible

The TesII PRO-S series adopts a hidden cables design, making the overall screen cleaner and more aesthetically pleasing.




## Aviation Plug Design

Both ends of the power cord are designed with aviation plugs for convenient, stable, and reliable connection.



## High Brightness

Vivid brilliance, enhanced visibility - our LED screens offer ultra high brightness for unmatched visual impact.

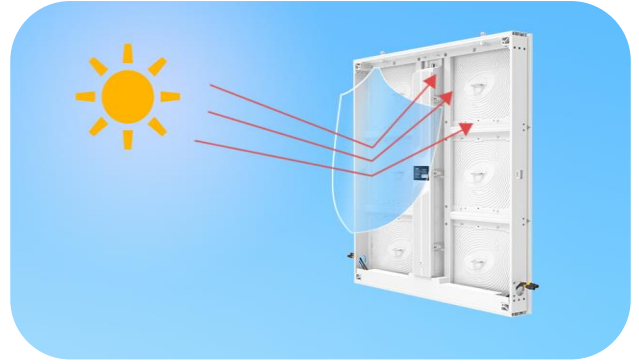


## Experience Cool Brilliance

Our LED display screens boast a heat-resistant white design, experience efficient temperature management in one remarkable display solution.



## Fully-enclosed

IP65 water proof cabinet with excellent protection to withstand extreme weather conditions.

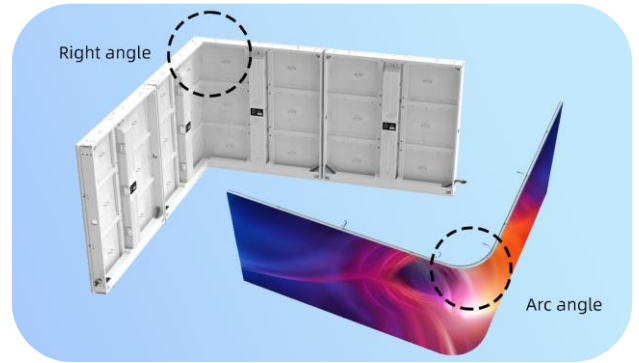

## Flexible Solutions

A variety of assembly methods to achieve a 3D effect solution of right angles or arcs.




## Energy-saving

Same brightness reduces power consumption, reduces operating costs, and extends service life.



## Sturdy & Durable

It is suitable for the installation and use of high salt fog and high corrosion areas such as rainy and humid areas and seaside areas.

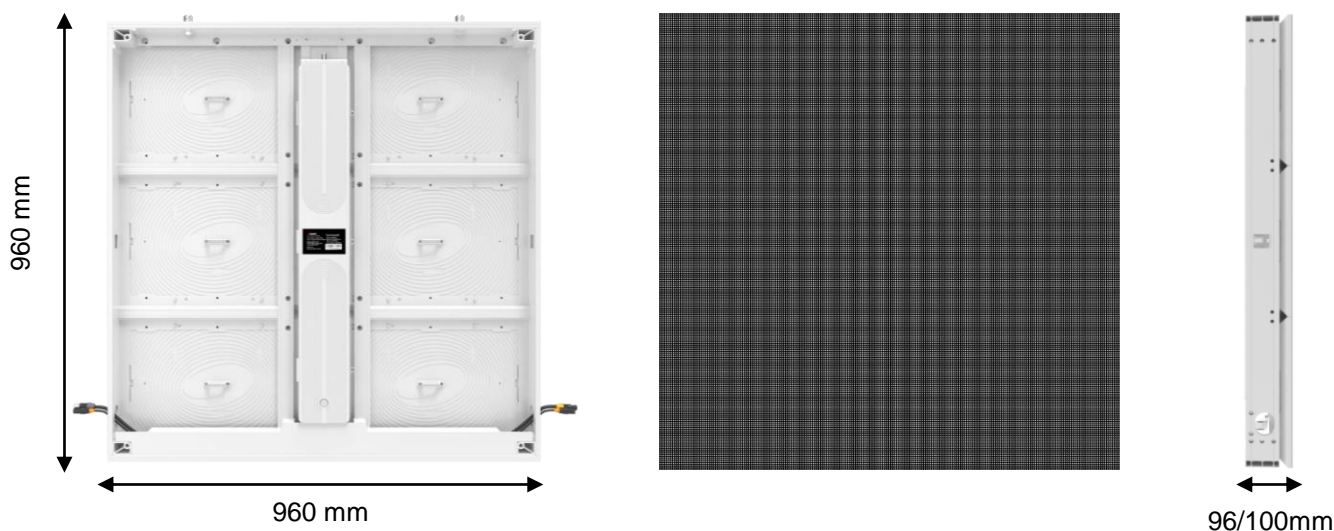

## Product Specifications

Product	P5	P6.6	P8	P10	P10.66	P16
Led Type	SMD 1921	SMD 2727	SMD 2727	SMD 2727	DIP 346	DIP 346
Pixel Pitch(mm)	5	6.6	8	10	10.66	16
Module Size (mm)	480 × 320					
Cabinet Size (mm)	960x960x96				960x960x100	
Weight (Kg)	24±5%				29±5%	
Brightness (cd/m <sup>2</sup> )	6,000(typ.), (5,000-10,000 adjustable)				10,000(typ.), (6,000-12,000 adjustable)	
Max Power Consumption (W/m <sup>2</sup> )	780	780	780	780	500/350	500/350
Avg Power Consumption (W/m <sup>2</sup> )	250	250	250	250	150/105	150/105
Refresh Rate (Hz)	1,920-3,840					
Gray Scale (Bit)	14-16					
Cabinet Material	Aluminum					
Viewing Angle (H/V)	140° / 120°				120° / 60°	
IP Rating	IP65					
Service Ability	Rear					

# Applications




Street Furniture



Billboard



Digital Sign

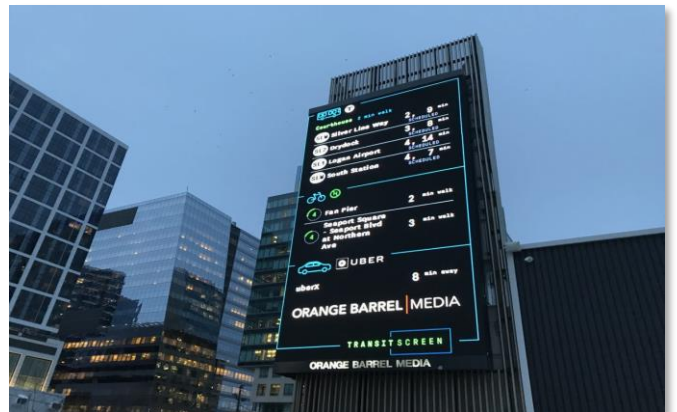

Transit Center



Spectacular



Sports